


# **Ice-Gun® Glass Freezer**



## **Users Manual**

## Packing List

Ice-Gun® Glass Freezer	x1
User's Manual	x1
Sealing Rings	x2

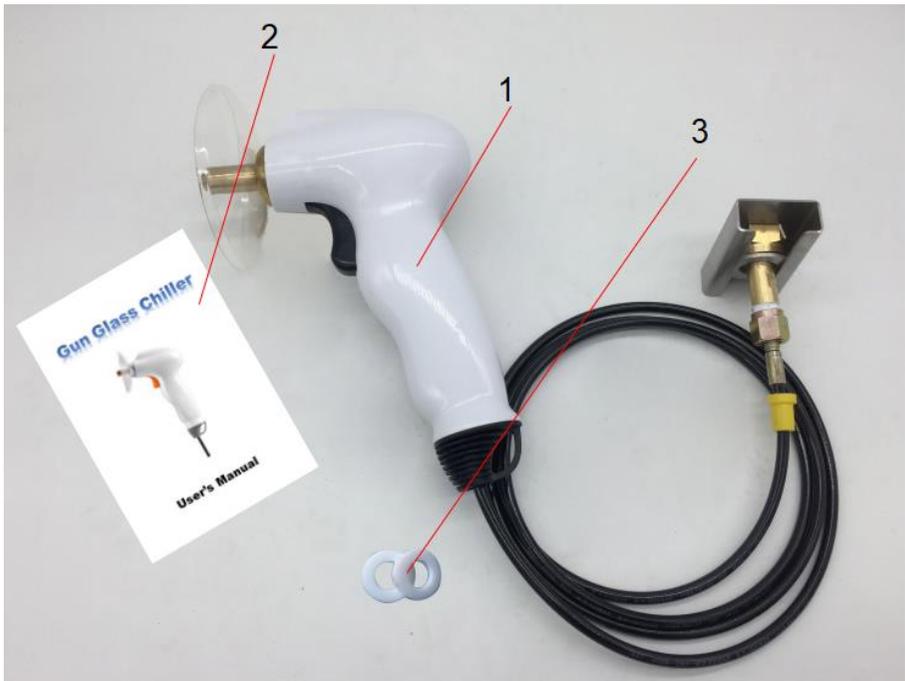


**WARNING:** This product works with liquid CO<sub>2</sub> only. Never connect any other compressed gas cylinders with high pressure. A liquid CO<sub>2</sub> cylinder with siphon tube or dip tube is preferred to deliver liquid CO<sub>2</sub>. If a standard gas CO<sub>2</sub> cylinder is used, the cylinder must be placed upside down to deliver liquid CO<sub>2</sub>. Install this product in a well ventilated area, otherwise a

high level of CO<sub>2</sub> may accumulate.

DO NOT aim this product at your own or any other people's face.

## Preparation Before Use

**Step 1:** A CO<sub>2</sub> cylinder with a siphon tube or dip tube to the bottom of it is preferred, so that the liquid CO<sub>2</sub> can be delivered directly up to the dry ice machine, and achieve perfect performance.

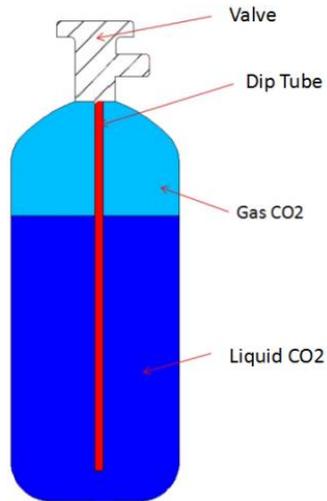

## Step 2: AA(1.5V)X2 Dry Batteries



## Installation

**Step 1:** Take the product out of the package and install the 2 batteries.





**Step 2:** Loosen the nozzle and install the transparent cover.



**Step 3:**

Take the sealing ring out of accessory bag, insert it into the connection nut.

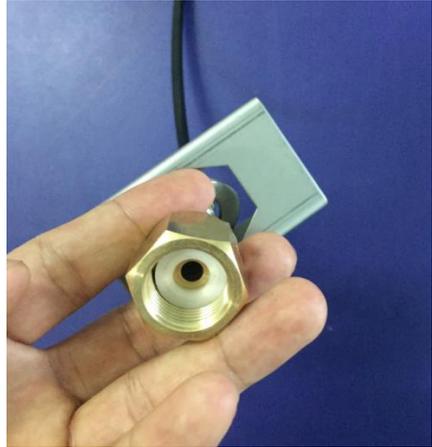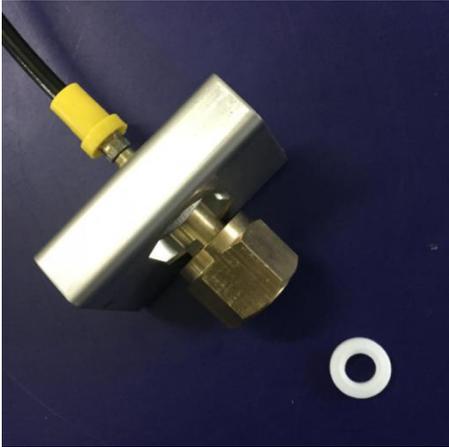

**Step4:** Connect the product with the CO2 cylinder.

Firstly, use your fingers to screw the nut onto the valve of the CO2 cylinder. Secondly, use the wrench on product to reinforce the connection between the nut and cylinder.



## Turn on the product

Open the valve of the CO2 cylinder, make sure no gas leaking, then press the trigger on the gun glass chiller and it begins to work, get ready to chill your glasses now!

It is advisable to keep the transparent cover close the rim of the glassware but not too tight.



## Replace the CO2 Cylinder

When the gun does not spray CO2 gas strong enough to frost a glass between 7-10 seconds, or does not chill at all, this is an indication that it is time to replace the empty cylinder with a full one, please follow the instructions carefully.

1. Close the stopcock of the cylinder.
2. Press the trigger repeatedly until all pressure is released.
3. Screw off the CO2 gun glass chiller fitting from the cylinder.
4. Connect the unit to a cylinder full of liquid CO2 as instructed above.